



F  
L  
U  
X  
  
S  
R  
L

EASY62 TRACK-230V



**Sede Legale:**

Via Brigata Macerata, 70 - 62100  
MACERATA - ITALIA  
P.I. IT 01997820434 -  
REA: MC-253306  
T. +39.071.0960074  
info@fluxitalia.com  
www.fluxitalia.com

## PRODUCT SERIES

## EASY TRACK 230V

### LIGHT SOURCE

LED TYPE	COB
POWER MAX	18W-25W
LUMINOUS FLUX	1600-1800LM
LUMINOUS EFFICIENCY(LM/W)	77LM/W
ENERGY EFFICIENCY INDEX	A+
COLOUR RENDERING INDEX(RA)	CRI>90
LED COLOUR TEMPERATURE(K)	3000K-3200K 3500K-4000K
STEP McADAM	SDCM 2
AVERAGE OPERATIONAL LIFE	30.000 HRS

### OPTIC

REFLECTOR	PLASTIC REFLECTOR
BEAM ANGLE	14°-24°-36°
LIGHT DISTRIBUTION SYMMETRY	SYMMETRIC
ACCESSORIES	FRESNEL LENS FROSTED LENS HONEYCOMB SNOOTER

### LED FIXTURE

HOUSING	ALUMINIUM
FINISH/ COLOUR	MATTE WHITE/MATTE BLACK/ SILVER GREY CUSTOMIZED RAL COLOUR (on request)
IP PROTECTION GRADE	IP20
INSULATION CLASS	CLASS II

### ELECTRICAL FEATURES

DRIVER	BUILT-IN ADPTOR
FIXED OR DIMMABLE	PUSH/1-10V/DALI
FOR EMERGENCY LIGHTING	SUITABLE
CONNECTION	500MA-600MA

### MECHANICAL FEATURES


DIMENSIONS (MM)	D62XH115MM
WEIGHT	0.520KGS
TYPE OF INSTALLATION	HIGH VOLTAGE TRACK
APPROVAL	CE/ROHS/GCC

## TECHNICAL DATA

P  
H  
O  
T  
O



D  
R  
A  
W  
I  
N  
G

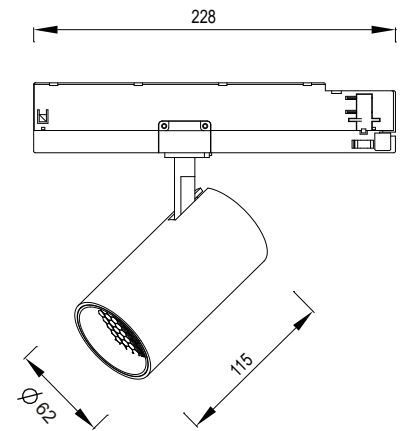


## ACCESSORIES



FRESNEL



FROSTED



HONEYCOMB




SNOOTER


# OPTIC & PHOTOMETRIC DATA



S-Spot  
q 9°-15°

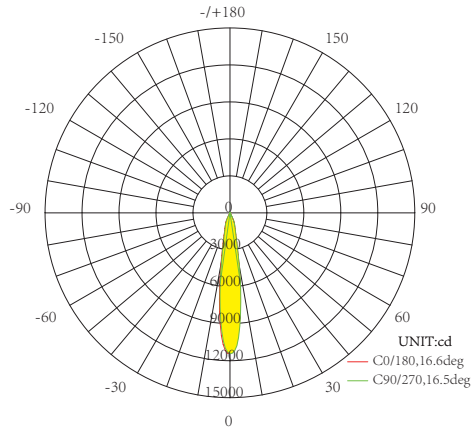


AVERAGE BEAM ANGLE(50%): 16.6 DEG

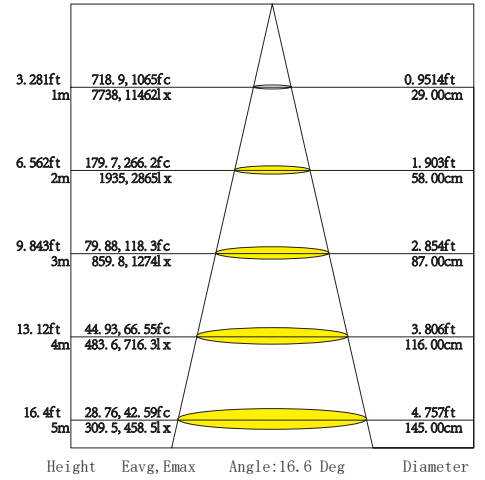


14° 20W 3500K RA>90 CLEAR LENS



M-Medium  
q 16°-25°

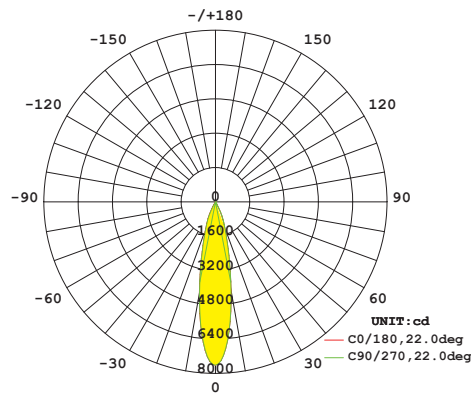


AVERAGE BEAM ANGLE(50%): 22.0 DEG

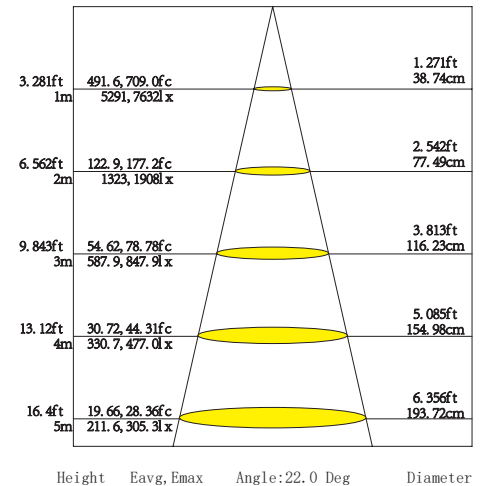


24° 20W 3500K RA>90 CLEAR LENS



F-Flood  
q 36°-39°

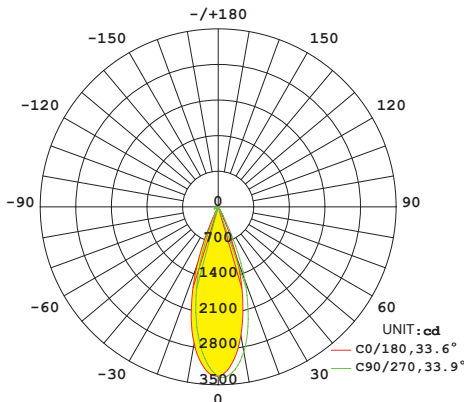

AVERAGE BEAM ANGLE(50%): 33.7 DEG

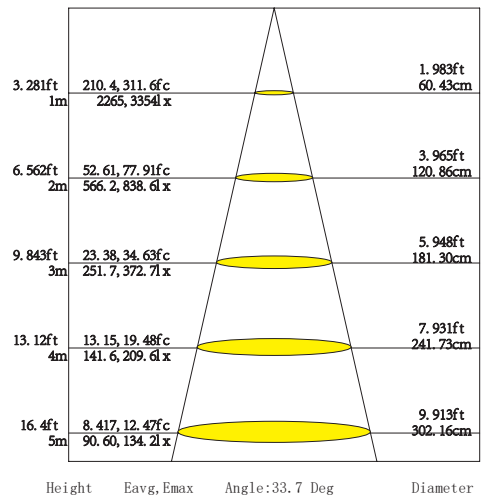

36° 20W 3500K RA>90 CLEAR LENS