



F
L
U
X

S
R
L

SINGLE TRIMLESS BOX
EASY 62 MAGNET 32



Sede Legale:

Via Brigata Macerata, 70 - 62100
MACERATA - ITALIA
P.I. IT 01997820434 -
REA: MC-253306
T. +39.071.0960074
info@fluxitalia.com
www.fluxitalia.com

PRODUCT SERIES

EASY MAGNET

LIGHT SOURCE

LED TYPE	COB
POWER MAX	18W-25W
LUMINOUS FLUX	2120-2550LM
LUMINOUS EFFICIENCY(LM/W)	121LM/W
ENERGY EFFICIENCY INDEX	A+
COLOUR RENDERING INDEX(RA)	CRI>90
LED COLOUR TEMPERATURE(K)	3000K-3200K 3500K-4000K
STEP McADAM	SDCM 2
AVERAGE OPERATIONAL LIFE	30.000 HRS

OPTIC

REFLECTOR	PLASTIC REFLECTOR
BEAM ANGLE	14°-24°-36°
LIGHT DISTRIBUTION SYMMETRY	SYMMETRIC
ACCESSORIES	FRESNEL LENS FROSTED LENS HONEYCOMB SNOOTER

LED FIXTURE

HOUSING	ALUMINIUM
FINISH/ COLOUR	MATTE WHITE/MATTE BLACK/ SILVER GREY CUSTOMIZED RAL COLOUR (on request)
IP PROTECTION GRADE	IP20
INSULATION CLASS	CLASS III


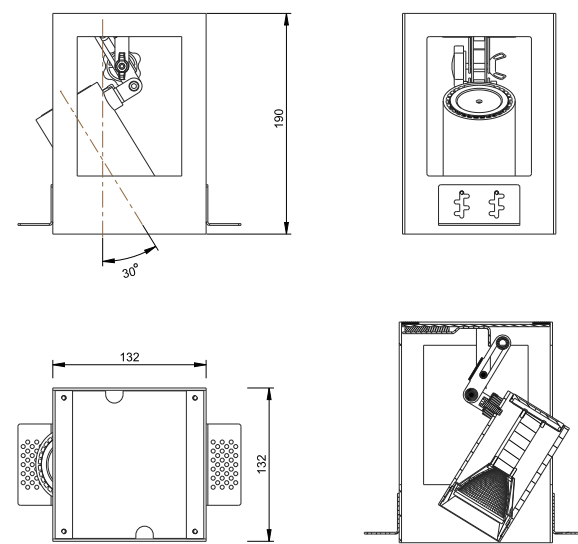
ELECTRICAL FEATURES

DRIVER	REMOTE
FIXED OR DIMMABLE	PUSH/1-10V/DALI
FOR EMERGENCY LIGHTING	SUITABLE
CONNECTION	500MA-600MA

MECHANICAL FEATURES

DIMENSIONS (MM)	D62XH115MM
DIMENSIONS OF TRIMLESS BOX(MM)	L132XW132XH190MM
WEIGHT	0.665KGS EACH SPOT(NOT INCLUDING BOX)
TYPE OF INSTALLATION	MAGNET BASE ARM32 WITH BOX
APPROVAL	UL E514245 CB CE ROHS

TECHNICAL DATA

<p>P H O T O</p>		<p>D R A W I N G</p>	
----------------------------------	---	--	--


ACCESSORIES



FRESNEL



FROSTED



HONEYCOMB




SNOOTER


OPTIC & PHOTOMETRIC DATA



S-Spot
q 9°-15°

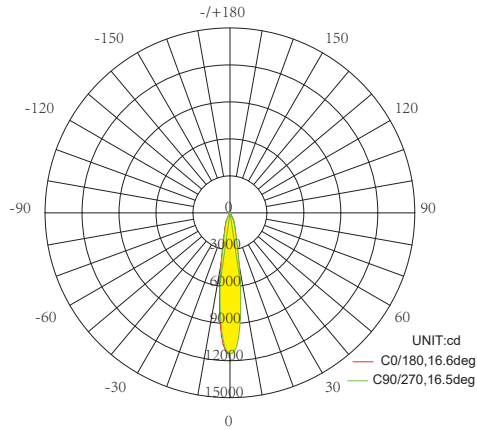


AVERAGE BEAM ANGLE(50%):16.6 DEG

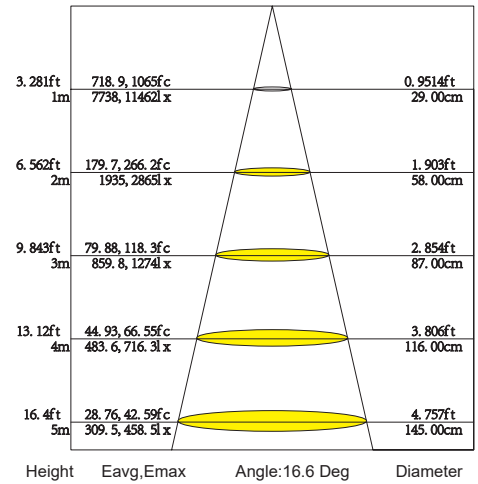


14° 20W 3500K RA>90 CLEAR LENS



M-Medium
q 16°-25°

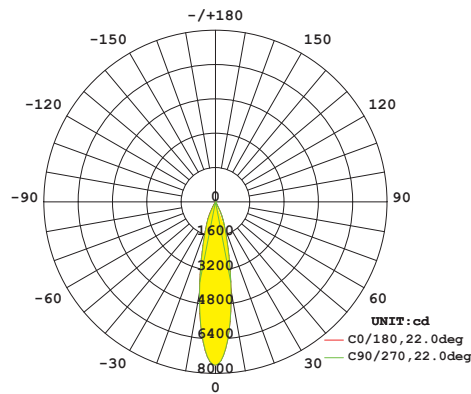


AVERAGE BEAM ANGLE(50%):22.0 DEG

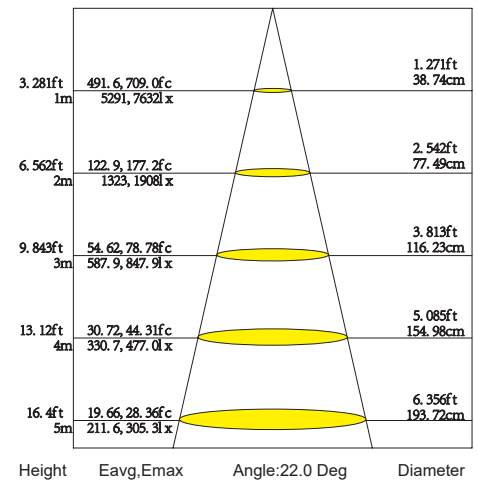


24° 20W 3500K RA>90 CLEAR LENS



F-Flood
q 36°-39°

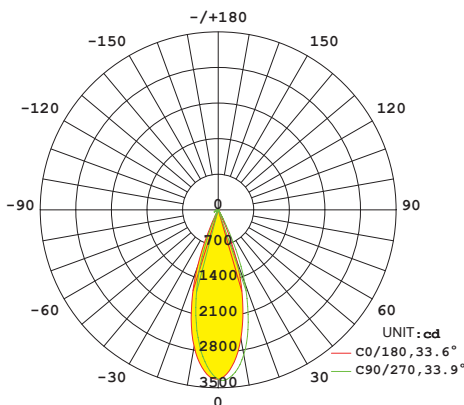

AVERAGE BEAM ANGLE(50%):33.7 DEG

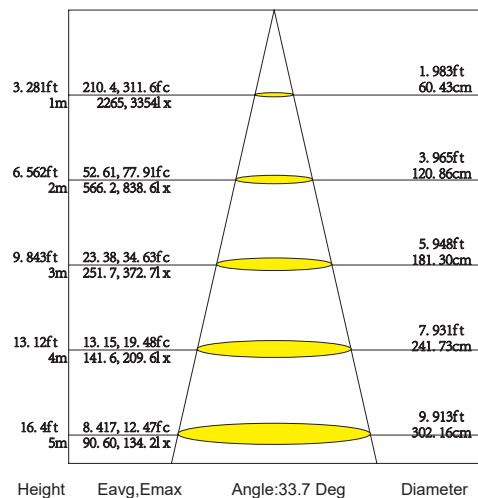

36° 20W 3500K RA>90 CLEAR LENS