

F
L
U
X

S
R
L

DC48V PERLA MINI TRACK



Sede Legale:

Via Brigata Macerata, 70 - 62100
MACERATA - ITALIA
P.I. IT 01997820434 -
REA: MC-253306
T. +39.071.0960074
info@fluxitalia.com
www.fluxitalia.com

PRODUCT SERIES

PERLA DC48V

LIGHT SOURCE

LED TYPE	CHIP
POWER MAX	9W
LUMINOUS FLUX	874LM
LUMINOUS EFFICIENCY(LM/W)	103LM/W
ENERGY EFFICIENCY INDEX	A+
COLOUR RENDERING INDEX(RA)	CRI>90
LED COLOUR TEMPERATURE(K)	3000K-3200K 3500K-4000K
STEP McADAM	SDGM 3
AVERAGE OPERATIONAL LIFE	30.000 HRS

OPTIC

REFLECTOR	PLASTIC LENS
BEAM ANGLE	20°
LIGHT DISTRIBUTION SYMMETRY	SYMMETRIC
ACCESSORIES	FRESNEL LENS SATIN FILM HONEYCOMB FLAT-MEDIUM-LONG RING

LED FIXTURE

HOUSING	ALUMINIUM
FINISH/ COLOUR	MATTE WHITE/MATTE BLACK/ SILVER GREY CUSTOMIZED RAL COLOUR (on request)
IP PROTECTION GRADE	IP20
INSULATION CLASS	CLASS III

ELECTRICAL FEATURES




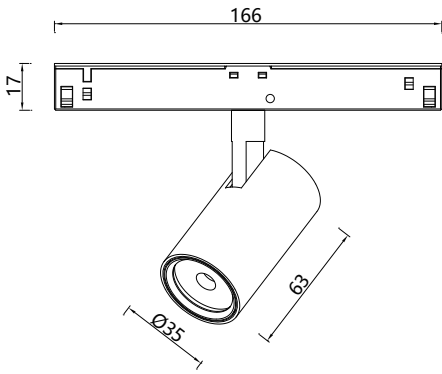
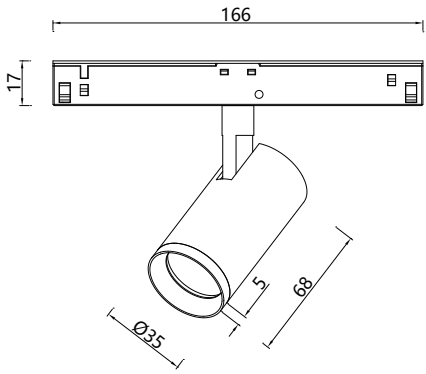
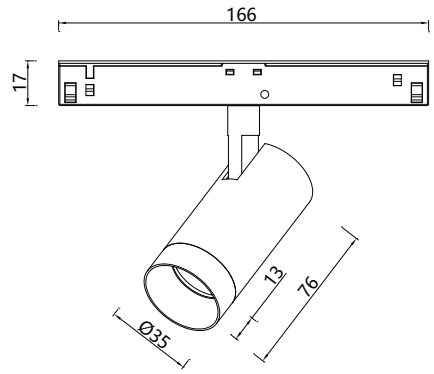
DRIVER	BUILT-IN ADAPTOR DV48V
CONNECTION IN	250MA

MECHANICAL FEATURES

DIMENSIONS (MM)	D35XH63MM/D35XH68MM/ D35XH76MM
WEIGHT	0.155KGS
TYPE OF INSTALLATION	DC48V TRACK SYSTEM
APPROVAL	UL E516144 CE ROHS



TECHNICAL DATA

P H O T O	<p>DC48V PERLA MINI TRACK FLAT RING</p> 	<p>DC48V PERLA MINI TRACK MEDIUM RING</p> 	<p>DC48V PERLA MINI TRACK LONG RING</p> 
	<p>D R A W I N G S</p> 		

ACCESSORIES



OPTIC & PHOTOMETRIC DATA



M-Medium
q 16°-25°

