



F
L
U
X

S
R
L

DC48V EASY62 TRACK



Sede Legale:

Via Brigata Macerata, 70 - 62100
MACERATA - ITALIA
P.I. IT 01997820434 -
REA: MC-253306
T. +39.071.0960074
info@fluxitalia.com
www.fluxitalia.com

PRODUCT SERIES

EASY DC48V

LIGHT SOURCE

LED TYPE	COB
POWER MAX	18W-25W
LUMINOUS FLUX	2120-2550LM
LUMINOUS EFFICIENCY(LM/W)	121LM/W
ENERGY EFFICIENCY INDEX	A+
COLOUR RENDERING INDEX(RA)	CRI>90
LED COLOUR TEMPERATURE(K)	3000K-3200K 3500K-4000K
STEP McADAM	SDCM 2
AVERAGE OPERATIONAL LIFE	30.000 HRS

OPTIC

REFLECTOR	PLASTIC REFLECTOR
BEAM ANGLE	14°-24°-36°
LIGHT DISTRIBUTION SYMMETRY	SYMMETRIC
ACCESSORIES	FRESNEL LENS FROSTED LENS HONEYCOMB SNOOTER

LED FIXTURE

HOUSING	ALUMINIUM
FINISH/ COLOUR	MATTE WHITE/MATTE BLACK BLACK/SILVER GREY CUSTOMIZED RAL COLOUR (on request)
IP PROTECTION GRADE	IP20
INSULATION CLASS	CLASS III

ELECTRICAL FEATURES


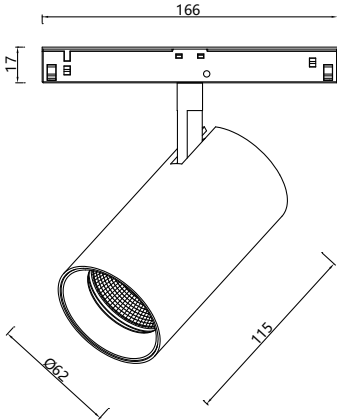
DRIVER	BUILT-IN ADAPTOR DC48V
FOR EMERGENCY LIGHTING	SUITABLE
CONNECTION	500MA-600MA

MECHANICAL FEATURES

DIMENSIONS (MM)	D62XH115MM
WEIGHT	0.694KGS
TYPE OF INSTALLATION	DC48V TRACK SYSTEM
APPROVAL	UL E516144 CE ROHS



TECHNICAL DATA

P H O T O		D R A W I N G	
-----------------------	-----------------------------------------------------------------------------------	---------------------------------	-------------------------------------------------------------------------------------


ACCESSORIES



FRESNEL



FROSTED



HONEYCOMB



SNOOTER



TRACK



STRAIGHT
JOINT



END FEED



STRAIGHT-
POWER
CONNECTOR




L-POWER
CONNECTOR


OPTIC & PHOTOMETRIC DATA



S-Spot
q 9°-15°

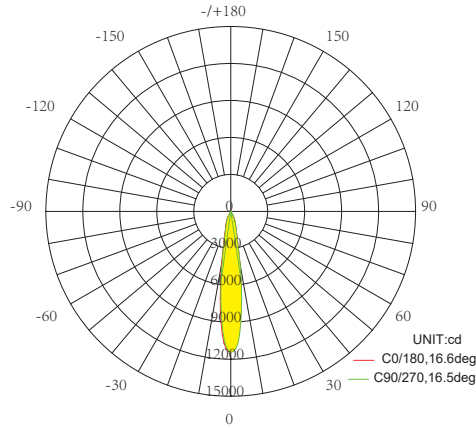


AVERAGE BEAM ANGLE(50%):16.6 DEG

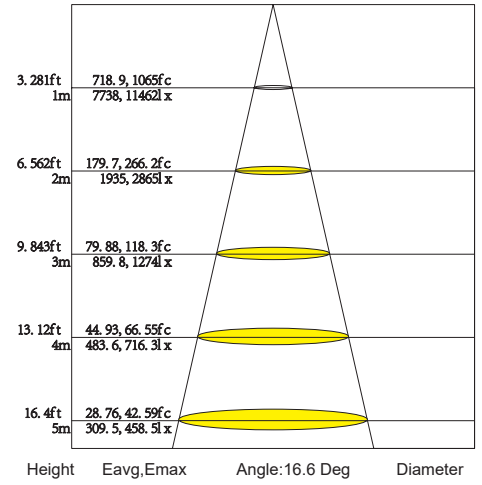


14° 20W 3500K RA>90 CLEAR LENS



M-Medium
q 16°-25°

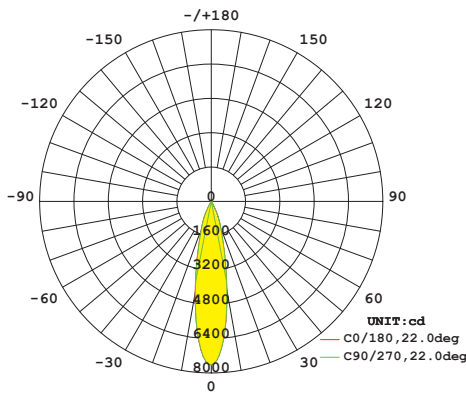


AVERAGE BEAM ANGLE(50%):22.0 DEG

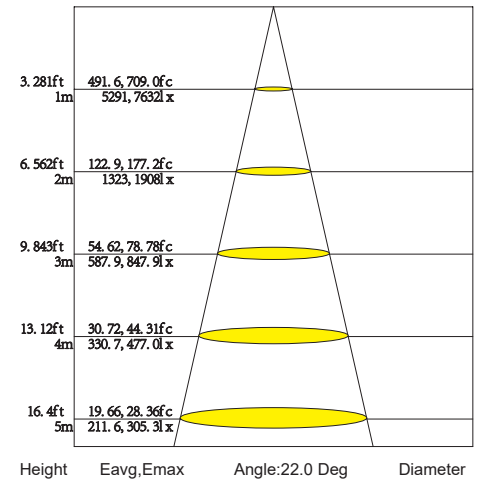


24° 20W 3500K RA>90 CLEAR LENS



F-Flood
q 36°-39°

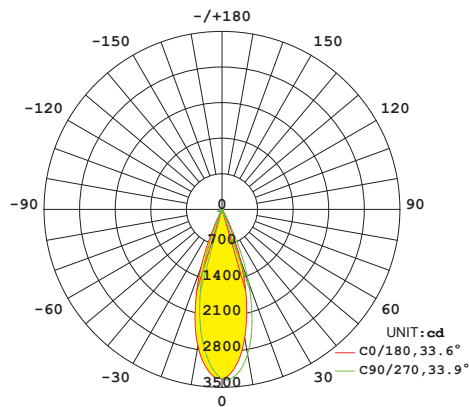

AVERAGE BEAM ANGLE(50%):33.7 DEG

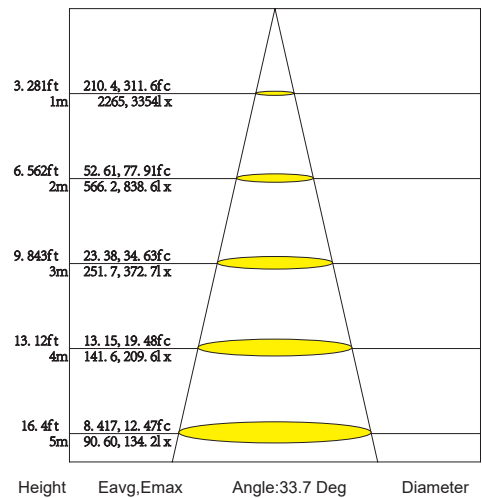

36° 20W 3500K RA>90 CLEAR LENS