

F  
L  
U  
X  
  
S  
R  
L

# EASY80 TRACK 230V DOUBLE ARM



**Sede Legale:**

Via Brigata Macerata, 70 - 62100

MACERATA - ITALIA

P.I. IT 01997820434 -

REA: MC-253306

T. +39.071.0960074

[info@fluxitalia.com](mailto:info@fluxitalia.com)

[www.fluxitalia.com](http://www.fluxitalia.com)

## PRODUCT SERIES

## EASY TRACK 230V

## LIGHT SOURCE

LED TYPE	COB
POWER MAX	30W
LUMINOUS FLUX	2842LM
LUMINOUS EFFICIENCY(LM/W)	111LM/W
ENERGY EFFICIENCY INDEX	A+
COLOUR RENDERING INDEX(RA)	CRI>90
LED COLOUR TEMPERATURE(K)	3000K-3200K 3500K-4000K
STEP McADAM	SDCM 2
AVERAGE OPERATIONAL LIFE	30.000 HRS

## OPTIC

REFLECTOR	PLASTIC REFLECTOR
BEAM ANGLE	14°-24°-36°
LIGHT DISTRIBUTION SYMMETRY	SYMMETRIC
ACCESSORIES	FRESNEL LENS FROSTED LENS HONEYCOMB SNOOTER

## LED FIXTURE

HOUSING	ALUMINIUM
FINISH/ COLOUR	MATTE WHITE/MATTE BLACK/ SILVER GREY CUSTOMIZED RAL COLOUR (on request)
IP PROTECTION GRADE	IP20
INSULATION CLASS	CLASS II


## ELECTRICAL FEATURES

DRIVER	REMOTE
FIXED OR DIMMABLE	PUSH/1-10V/DALI
FOR EMERGENCY LIGHTING	SUITABLE
CONNECTION	700MA

## MECHANICAL FEATURES

DIMENSIONS (MM)	D80XH130MM
WEIGHT	0.920KGS
TYPE OF INSTALLATION	HIGH VOLTAGE TRACK DOUBLE ARM 70+70
APPROVAL	CE ROHS

# TECHNICAL DATA

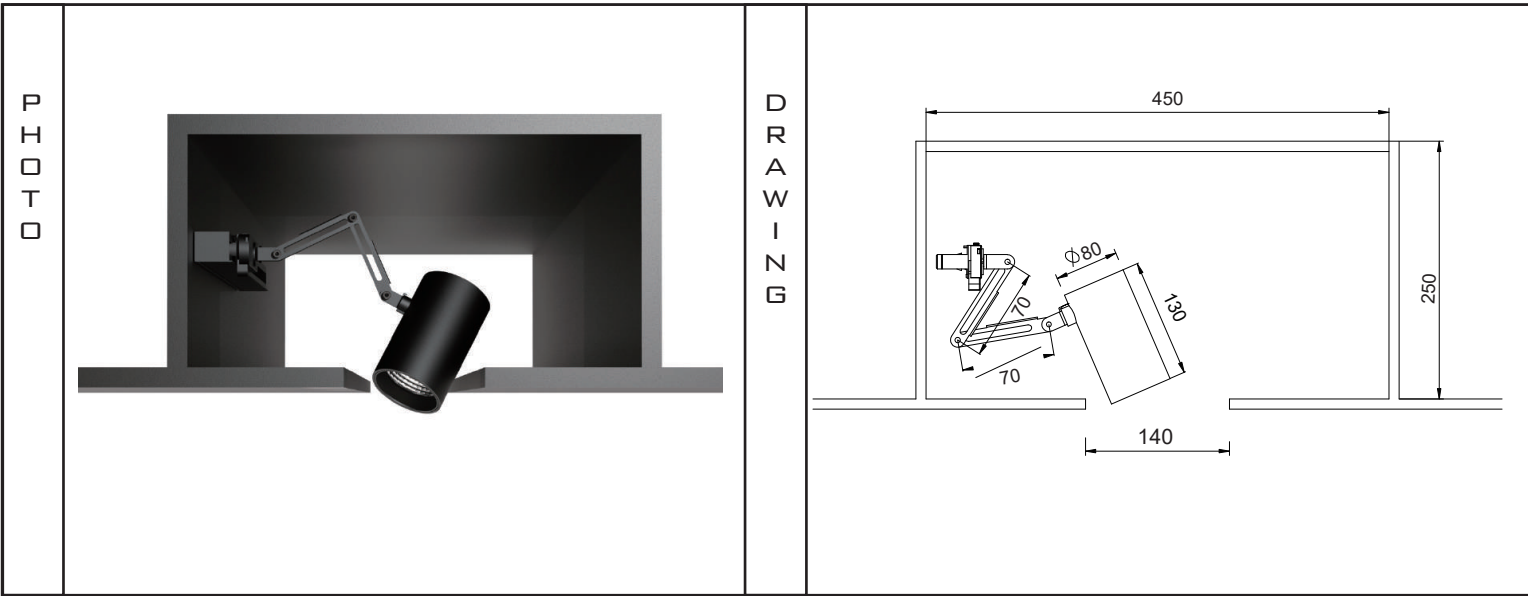


# ACCESSORIES



FRESNEL



FROSTED




HONEYCOMB


# OPTIC & PHOTOMETRIC DATA



S-Spot  
q 9°-15°

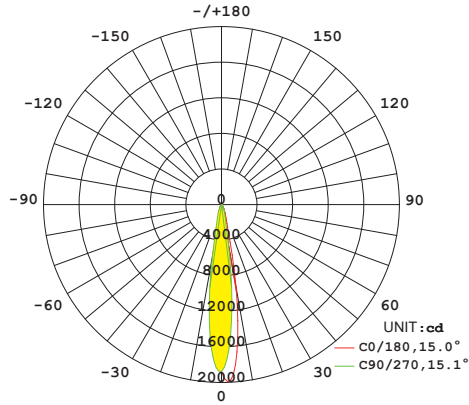


AVERAGE BEAM ANGLE(50%):15.1 DEG

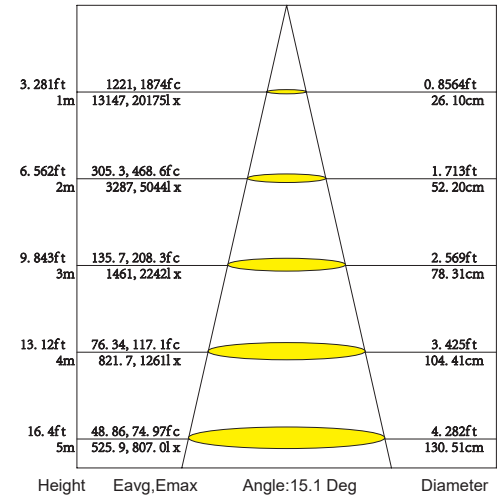


14° 30W 3500K RA>90 CLEAR LENS



M-Medium  
q 16°-25°

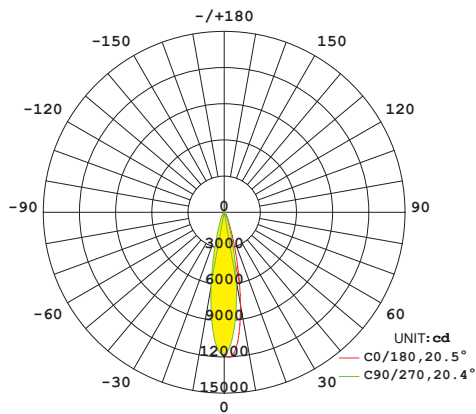


AVERAGE BEAM ANGLE(50%):20.5 DEG

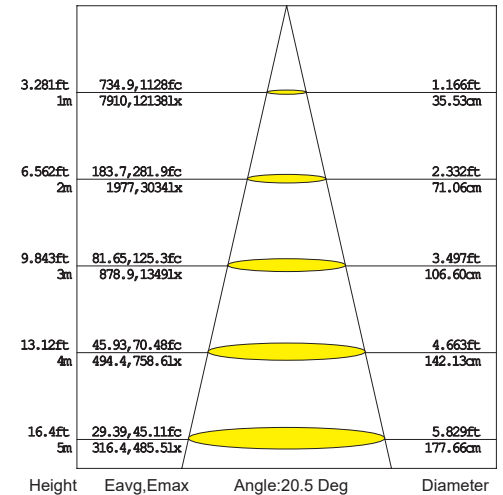


24° 30W 3500K RA>90 CLEAR LENS



F-Flood  
q 36°-39°

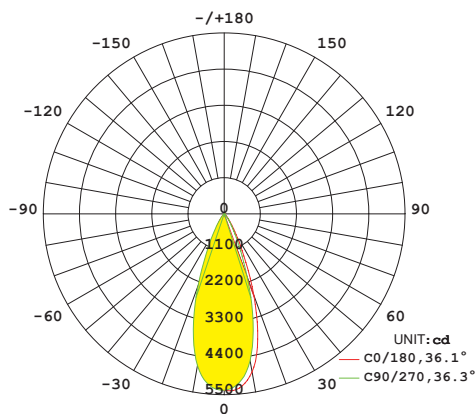

AVERAGE BEAM ANGLE(50%):36.2 DEG

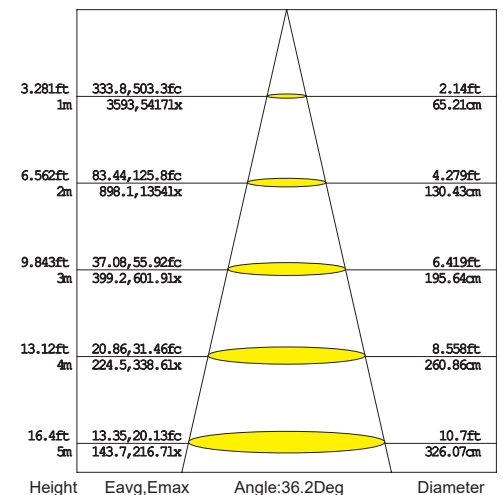

36° 30W 3500K RA>90 CLEAR LENS