

F
L
U
X

S
R
L

EASY80 TRACK 230V



Sede Legale:

Via Brigata Macerata, 70 - 62100
MACERATA - ITALIA
P.I. IT 01997820434 -
REA: MC-253306
T. +39.071.0960074
info@fluxitalia.com
www.fluxitalia.com

PRODUCT SERIES EASY TRACK 230V

LIGHT SOURCE

LED TYPE	COB
POWER MAX	30W
LUMINOUS FLUX	2842LM
LUMINOUS EFFICIENCY(LM/W)	111LM/W
ENERGY EFFICIENCY INDEX	A+
COLOUR RENDERING INDEX(RA)	GRI>90
LED COLOUR TEMPERATURE(K)	3000K-3200K 3500K-4000K
STEP MCADAM	SDCM 2
AVERAGE OPERATIONAL LIFE	30.000 HRS

OPTIC

REFLECTOR	PLASTIC REFLECTOR
BEAM ANGLE	14°-24°-36°
LIGHT DISTRIBUTION SYMMETRY	SYMMETRIC
ACCESSORIES	FRESNEL LENS FROSTED LENS HONEYCOMB SNOOTER

LED FIXTURE

HOUSING	ALUMINIUM
FINISH/ COLOUR	MATTE WHITE/MATTE BLACK/ SILVER GREY CUSTOMIZED RAL COLOUR (on request)
IP PROTECTION GRADE	IP20
INSULATION CLASS	CLASS II


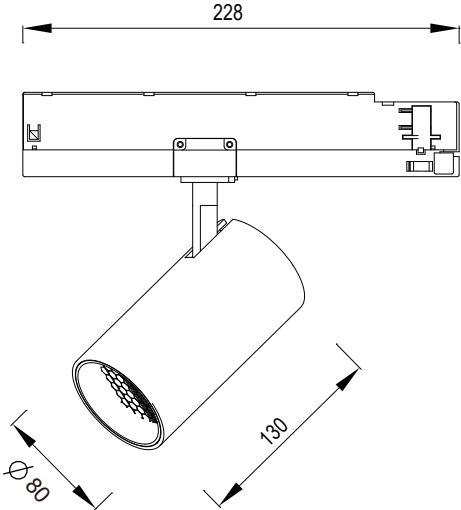
ELECTRICAL FEATURES

DRIVER	REMOTE
FIXED OR DIMMABLE	PUSH/1-10V/DALI
FOR EMERGENCY LIGHTING	SUITABLE
CONNECTION	700MA

MECHANICAL FEATURES

DIMENTIONS (MM)	D80XH130MM
WEIGHT	0.900KGS
TYPE OF INSTALLATION	HIGH VOLTAGE TRACK
APPROUVAL	CE ROHS

TECHNICAL DATA

P H O T O		D R A W I N G	
-----------------------	---	---------------------------------	--

ACCESSORIES



FRESNEL



FROSTED




HONEYCOMB


OPTIC & PHOTOMETRIC DATA



S-Spot
q 9°-15°

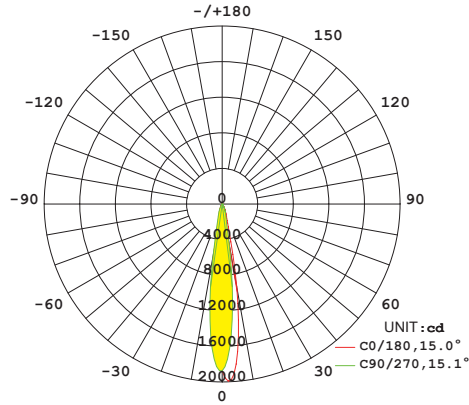


AVERAGE BEAM ANGLE(50%): 15.1 DEG

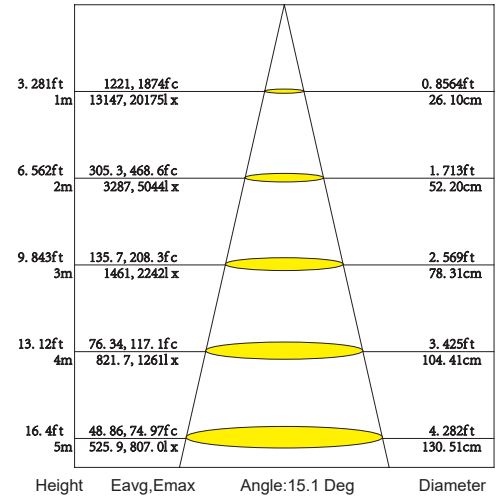


14° 30W 3500K RA>90 CLEAR LENS



M-Medium
q 16°-25°

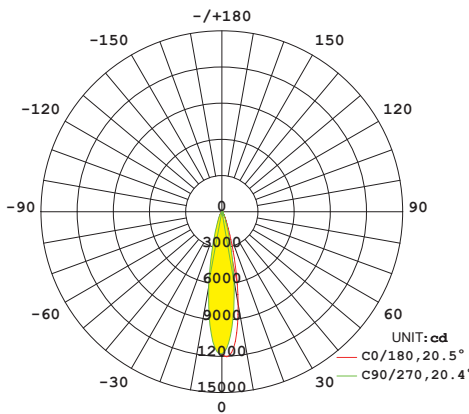


AVERAGE BEAM ANGLE(50%): 20.5 DEG

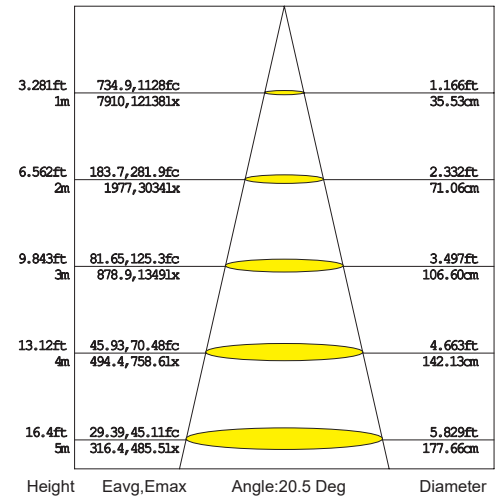


24° 30W 3500K RA>90 CLEAR LENS



F-Flood
q 36°-39°

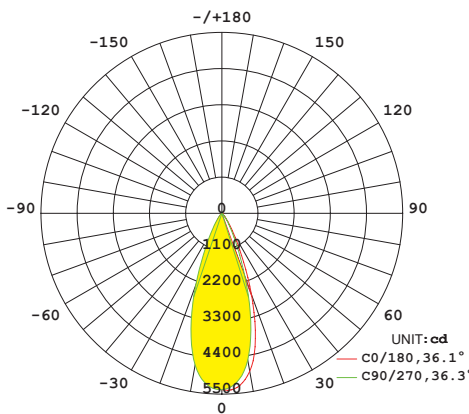

AVERAGE BEAM ANGLE(50%): 36.2 DEG

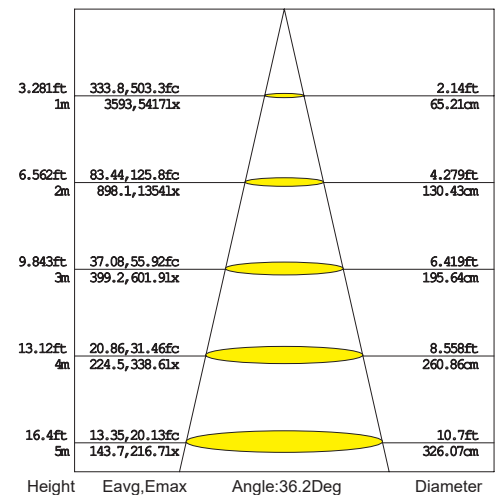

36° 30W 3500K RA>90 CLEAR LENS