

SPOTLIGHT TRACK 230V



EASY 52 NEO



APPLICATIONS

ARCHITECTURAL HIGHLIGHTING
DIRECT ILLUMINATION
SHOP WINDOWS LIGHTING
SHELF LIGHTING
SHOWCASE LIGHTING
COVE LIGHTING

FEATURES

CUSTOMIZABLE FINISHING
WIDE COLOR TEMPERATURE SPECTRUM
IP20 IP44 IP65
UNIFORM LIGHT DIFFUSION
LED CONFIGURATION



For more information please check our website www.fluxitalia.com

or contact us tel.+39 071 0960086 email: info@fluxitalia.com


Via Armando Cingolani, 13 Zona ind.le Sambucheto di Recanati 62019 Recanati (MC) - Italy

PRODUCT INFO



CEULCB

DRAWINGS

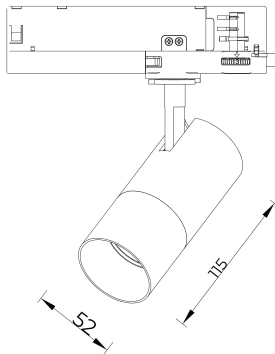

COLORS

STANDARD



WHITE



BLACK

SPECIAL



BRASS



GOLD



CHROME



COPPER

ON REQUEST



TECHNICAL DATA


LED TYPE	COB
POWER MAX	9W-15W
LUMINOUS FLUX	
LUMINOUS EFFICIENCY (LM/W)	
COLOUR RENDERING INDEX (RA)	CRI>90
LED COLOUR (K)	3000K-3200K3-500K-4000K
STEP MCADAM	SDCM 2
AVERAGE OPERATIONAL LIFE	30.000 HRS
OPTIC	REFLECTOR / LEDIL
BEAM ANGLE	18° - 25° - 36° - 60°
LIGHT DISTRIBUTION	SYMMETRIC
MATERIAL	ALUMINIUM
IP PROTECTION GRADE	IP 20
TYPE OF INSTALLATION	HIGH VOLTAGE TRACK
DRIVER	BUILT-IN ADAPTOR
FOR EMERGENCY LIGHTING	SUITABLE
SETTINGS	500mA - 600mA
DIMENSIONS (MM)	D62 X H130 MM



ACCESSORIES

XXXXXX


LENS FILM



FRESNEL




FROSTED




HONEYCOMB

OPTIC




LENS




REFLECTOR


COMPATIBLE TRACK




90001-ATRFL



90001-TRFL



90001FL



90001-15FL



90001-BHFL



For more information please check our website www.fluxitalia.com

or contact us tel.+39 071 0960086 email: info@fluxitalia.com

Via Armando Cingolani, 13 Zona ind.le Sambucheto di Recanati 62019 Recanati (MC) - Italy