

DOWNLIGHT RECESSED

FLUX

ZENIUS SNOOTER SMALL TRIMLESS R016/R018



APPLICATIONS

ARCHITECTURAL HIGHLIGHTING
DIRECT ILLUMINATION
SHOP WINDOWS LIGHTING
DRESSING ROOM
SHOWCASE LIGHTING
COVE LIGHTING

FEATURES

CUSTOMIZABLE FINISHING
WIDE COLOR TEMPERATURE SPECTRUM
IP20 IP44
UNIFORM LIGHT DIFFUSION
LED CONFIGURATION




or more information please check our website www.fluxitalia.com
or contact us tel.+39 071 0960086 email: info@fluxitalia.com
via Armando Cingolani, 13 Zona ind.le Sambucheto di Recanati 62019 Recanati (MC) - Italy


PRODUCT INFO

R016/R018

R016

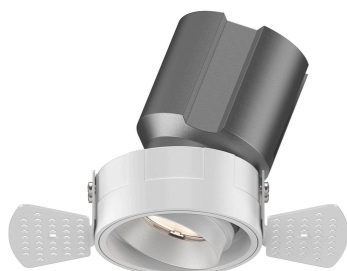

R018

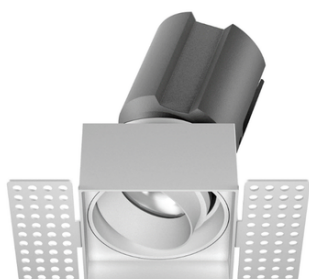

TECHNICAL DATA


LED TYPE	COB
POWER MAX	7W
LUMINOUS FLUX (lm)*	582lm
LUMINOUS EFFICIENCY (lm/W)*	83
COLOUR RENDERING INDEX (RA)	CRI>90
LED COLOUR (K)	2700K - 3000K - 3500K - 4000K
STEP MCADAM	SDCM 2
AVERAGE OPERATIONAL LIFE	50.000 HRS
OPTIC	LENS
BEAM ANGLE	15° - 24° - 36° - 50°
LIGHT DISTRIBUTION	SYMMETRIC
LIGHT DIRECTION	ADJUSTABLE 5°
IP PROTECTION GRADE	IP20 IP44
TYPE OF INSTALLATION	RECESSED
DRIVER	REMOTE
FOR EMERGENCY LIGHTING	SUITABLE
CUT HOLE (mm)	Ø 57

*refers to max W / 3500K / 24°

■ 57,5x57,5




DRAWINGS

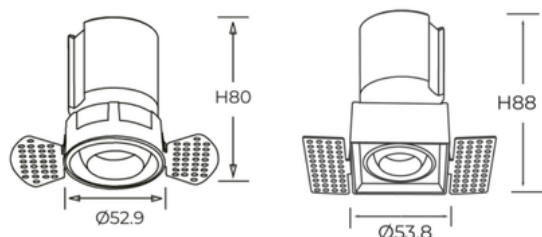

COLORS

STANDARD



ON REQUEST



ACCESSORIES

R016/R018


LENS FILM



FRESNEL
0075



FROSTED
0076



HONEYCOMB
0077

SNOOTER

