

DOWNLIGHT RECESSED

**FLUX**

## ZENIUS SNOOTER MEDIUM TRIMLESS R020/R022



### APPLICATIONS

ARCHITECTURAL HIGHLIGHTING  
DIRECT ILLUMINATION  
SHOP WINDOWS LIGHTING  
DRESSING ROOM  
SHOWCASE LIGHTING  
COVE LIGHTING

### FEATURES

CUSTOMIZABLE FINISHING  
WIDE COLOR TEMPERATURE SPECTRUM  
IP20 IP44  
UNIFORM LIGHT DIFFUSION  
LED CONFIGURATION



For more information please check our website [www.fluxitalia.com](http://www.fluxitalia.com)  
or contact us tel.+39 071 0960086 email: [info@fluxitalia.com](mailto:info@fluxitalia.com)  
via Armando Cingolani, 13 Zona ind.le Sambucheto di Recanati 62019 Recanati (MC) - Italy

**PRODUCT INFO**

**R020/R022**

**R020**



**R022**



**TECHNICAL DATA**


LED TYPE	<b>COB</b>
POWER MAX	<b>20W</b>
LUMINOUS FLUX (lm)*	<b>2021lm</b>
LUMINOUS EFFICIENCY (lm/W)*	<b>101</b>
COLOUR RENDERING INDEX (RA)	<b>CRI&gt;90</b>
LED COLOUR (K)	<b>2700K - 3000K - 3500K - 4000K</b>
STEP MCADAM	<b>SDCM 2</b>
AVERAGE OPERATIONAL LIFE	<b>50.000 HRS</b>
OPTIC	<b>LENS</b>
BEAM ANGLE	<b>15° - 24° - 36° - 50°</b>
LIGHT DISTRIBUTION	<b>SYMMETRIC</b>
LIGHT DIRECTION	<b>ADJUSTABLE 5°</b>
IP PROTECTION GRADE	<b>IP20 IP44</b>
TYPE OF INSTALLATION	<b>RECESSED</b>
DRIVER	<b>REMOTE</b>
FOR EMERGENCY LIGHTING	<b>SUITABLE</b>
CUT HOLE (mm)	<b>Ø 77</b>

\*refers to max W / 3500K / 24°

■ **77x77**




**DRAWINGS**

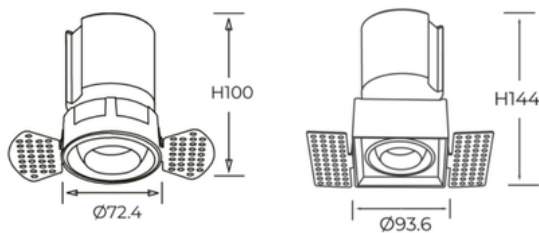

**COLORS**

**STANDARD**



**ON REQUEST**



**ACCESSORIES**

**R020/R022**


**LENS FILM**



FRESNEL  
0078



FROSTED  
0079



HONEYCOMB  
0080

**SNOOTER**

