

DOWNLIGHT RECESSED

FLUX

ZENIUS SNOOTER LARGE TRIMLESS R024/R026



APPLICATIONS

ARCHITECTURAL HIGHLIGHTING
DIRECT ILLUMINATION
SHOP WINDOWS LIGHTING
DRESSING ROOM
SHOWCASE LIGHTING
COVE LIGHTING

FEATURES

CUSTOMIZABLE FINISHING
WIDE COLOR TEMPERATURE SPECTRUM
IP20 IP44
UNIFORM LIGHT DIFFUSION
LED CONFIGURATION



For more information please check our website www.fluxitalia.com
or contact us tel.+39 071 0960086 email: info@fluxitalia.com
via Armando Cingolani, 13 Zona ind.le Sambucheto di Recanati 62019 Recanati (MC) - Italy

PRODUCT INFO

R024/R026

R024



R026



TECHNICAL DATA


LED TYPE	COB
POWER MAX	30W
LUMINOUS FLUX (lm)*	3115.5lm
LUMINOUS EFFICIENCY (lm/W)*	104
COLOUR RENDERING INDEX (RA)	CRI>90
LED COLOUR (K)	2700K - 3000K - 3500K - 4000K
STEP MCADAM	SDCM 2
AVERAGE OPERATIONAL LIFE	50.000 HRS
OPTIC	LENS
BEAM ANGLE	15° - 24° - 36° - 50°
LIGHT DISTRIBUTION	SYMMETRIC
LIGHT DIRECTION	ADJUSTABLE 5°
IP PROTECTION GRADE	IP20 IP44
TYPE OF INSTALLATION	RECESSED
DRIVER	REMOTE
FOR EMERGENCY LIGHTING	SUITABLE
CUT HOLE (mm)	Ø 55

*refers to max W / 3500K / 24°

■ 55X55




DRAWINGS

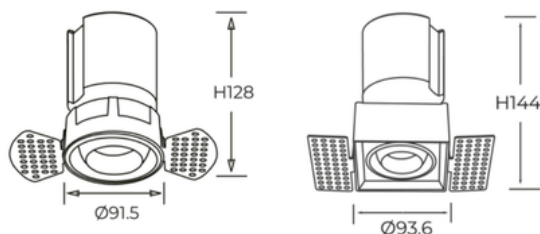

COLORS

STANDARD



ON REQUEST



ACCESSORIES

R024/R026


LENS FILM



FRESNEL
0081



FROSTED
0082



HONEYCOMB
0083

SNOOTER

