

DOWNLIGHT RECESSED

FLUX



ZENIUS WASHER MEDIUM TRIMLESS R032/R034



APPLICATIONS

- ARCHITECTURAL HIGHLIGHTING
- DIRECT ILLUMINATION
- SHOP WINDOWS LIGHTING
- DRESSING ROOM
- SHOWCASE LIGHTING
- COVE LIGHTING

FEATURES

- CUSTOMIZABLE FINISHING
- WIDE COLOR TEMPERATURE SPECTRUM
- IP20
- UNIFORM LIGHT DIFFUSION
- LED CONFIGURATION




For more information please check our website www.fluxitalia.com
or contact us tel.+39 071 0960086 email: info@fluxitalia.com
via Armando Cingolani, 13 Zona ind.le Sambucheto di Recanati 62019 Recanati (MC) - Italy


PRODUCT INFO

R032/R034

R032

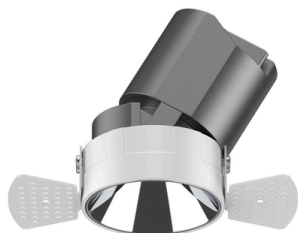

R034

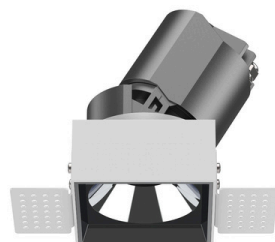

TECHNICAL DATA




LED TYPE	COB
POWER MAX	12W
LUMINOUS FLUX (lm)*	752.5lm
LUMINOUS EFFICIENCY (lm/W)*	63
COLOUR RENDERING INDEX (RA)	CRI>90
LED COLOUR (K)	2700K - 3000K - 3500K - 4000K
STEP MCADAM	SDCM 2
AVERAGE OPERATIONAL LIFE	50.000 HRS
OPTIC	LENS
BEAM ANGLE	15° - 24° - 36° - 50°
LIGHT DISTRIBUTION	SYMMETRIC
LIGHT DIRECTION	ADJUSTABLE 5°
IP PROTECTION GRADE	IP20
TYPE OF INSTALLATION	RECESSED
DRIVER	REMOTE
FOR EMERGENCY LIGHTING	SUITABLE
CUT HOLE (mm)	Ø77

*refers to max W / 3500K / 24°

77x77



DRAWINGS



COLORS

STANDARD



WHITE



BLACK



ON REQUEST



ACCESSORIES

R032/R034

REFLECTORS

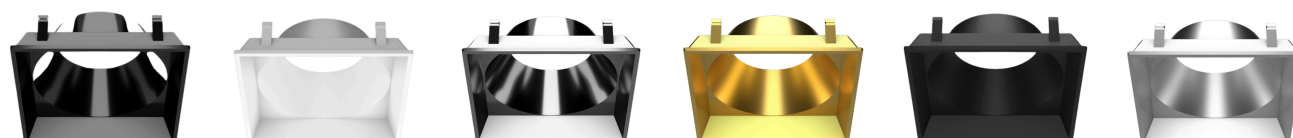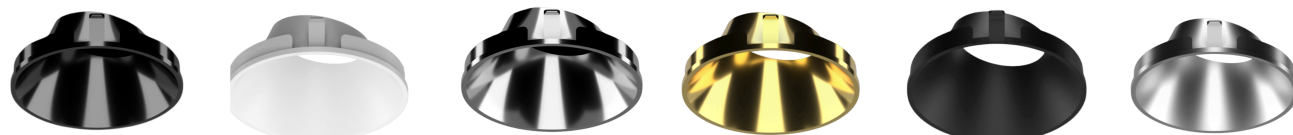


LENS FILM



FRESNEL
0081



FROSTED
0082



HONEYCOMB
0083

