

DOWNLIGHT RECESSED

FLUX

ZENIUS SNOOTER MEDIUM TRIMLESS R020/R022



APPLICATIONS

ARCHITECTURAL HIGHLIGHTING
DIRECT ILLUMINATION
SHOP WINDOWS LIGHTING
DRESSING ROOM
SHOWCASE LIGHTING
COVE LIGHTING

FEATURES

CUSTOMIZABLE FINISHING
WIDE COLOR TEMPERATURE SPECTRUM
IP20 IP44
UNIFORM LIGHT DIFFUSION
LED CONFIGURATION




For more information please check our website www.fluxitalia.com
or contact us tel.+39 071 0960086 email: info@fluxitalia.com
via Armando Cingolani, 13 Zona ind.le Sambucheto di Recanati 62019 Recanati (MC) - Italy


PRODUCT INFO

R020/R022

R020

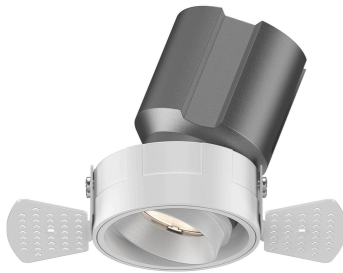

R022

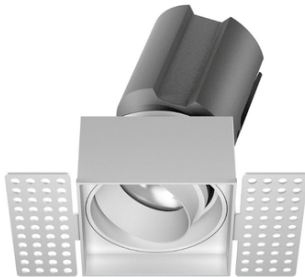


TECHNICAL DATA

LED TYPE	COB
POWER MAX	20W
LUMINOUS FLUX (lm)*	2021lm
LUMINOUS EFFICIENCY (lm/W)*	101
COLOUR RENDERING INDEX (RA)	CRI>90
LED COLOUR (K)	2700K - 3000K - 3500K - 4000K
STEP MCADAM	SDCM 2
AVERAGE OPERATIONAL LIFE	50.000 HRS
OPTIC	LENS
BEAM ANGLE	15° - 24° - 36° - 50°
LIGHT DISTRIBUTION	SYMMETRIC
LIGHT DIRECTION	ADJUSTABLE 5°
IP PROTECTION GRADE	IP20 IP44
TYPE OF INSTALLATION	RECESSED
DRIVER	REMOTE
FOR EMERGENCY LIGHTING	SUITABLE
CUT HOLE (mm)	Ø 77
	■ 77x77

*refers to max W / 3500K / 24°




DRAWINGS

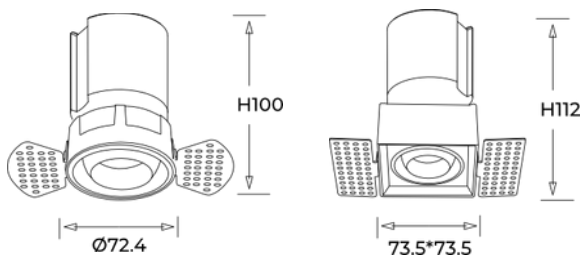

COLORS

STANDARD



ON REQUEST



ACCESSORIES

R020/R022

LENS FILM



FRESNEL
0078



FROSTED
0079



HONEYCOMB
0080

SNOOTER

