SPOTLIGHT

TRACK 230v



EASY 62 NEO DOUBLE ARM
T051



APPLICATIONS

ARCHITECTURAL HIGHLIGHTING
DIRECT ILLUMINATION
SHOP WINDOWS LIGHTING
SHELF LIGHTING
SHOWCASE LIGHTING
COVE LIGHTING

FEATURES

CUSTOMIZABLE FINISHING
WIDE COLOR TEMPERATURE SPECTRUM
IP20
UNIFORM LIGHT DIFFUSION
LED CONFIGURATION

For more information please check our website **www.fluxitalia.com**
or contact us tel.+39 071 0960086 email: info@fluxitalia.com
Via Armando Cingolani, 13 Zona ind.le Sambucheto di Recanati 62019 Recanati (MC) - Italy

EASY 62 NEO DOUBLE ARM

SPOTLIGHT TRACK 48

PRODUCT INFO


T051



TECHNICAL DATA

LED TYPE	**COB**
POWER MAX(W)	**30**
LUMINOUS FLUX(lm)	**2307**
LUMINOUS EFFICIENCY(lm/W)*	**132**
COLOUR RENDERING INDEX(RA)	**CRI>90**
LED COLOUR (K)	**2700K - 3000K - 3500K - 4000K**
STEPMCADAM	**SDCM 2**
AVERAGE OPERATIONAL LIFE	**50.000 HRS**
OPTIC	**REFLECTOR**
BEAM ANGLE	**18° - 25° - 36°- 50°**
LIGHT DISTRIBUTION	**SYMMETRIC**
MATERIAL	**ALUMINIUM**
IP PROTECTION GRADE	**IP20**
TYPE OF INSTALLATION	**HIGH VOLTAGE TRACK**
DRIVER	**BUILT-IN ADAPTOR**
FOR EMERGENCY LIGHTING	**SUITABLE**
DIMENTIONS(mm)	**Ø62 X H135 mm** **ARM 70+70 mm**

DRAWINGS

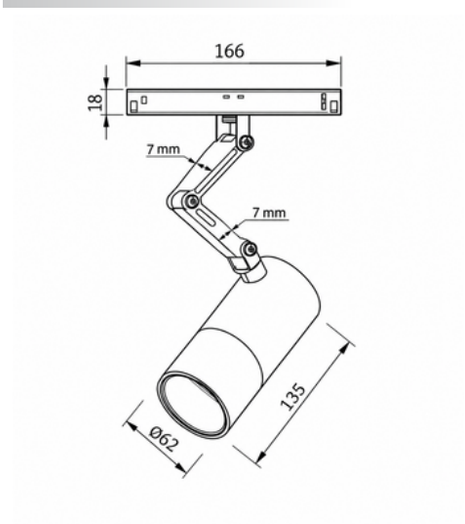

COLORS

STANDARD

WHITE

BLACK

ON REQUEST

For more information please check our website **www.fluxitalia.com**
or contact us tel.+39 071 0960086 email: info@fluxitalia.com
Via Armando Cingolani, 13 Zona ind.le Sambucheto di Recanati 62019 Recanati (MC) - Italy

ACCESSORIES T051


LENS FILM



FRESNEL



FROSTED



HONEYCOMB

OPTIC




LENS



REFLECTOR

COMPATIBLE TRACK



T031



T079



T076



T078



T200



T082



T070



T081



T080



T077



T083



T084